


(  
).  
-  
ABS Bayer,  
:  
(24 . - 14 .)



FCV/T

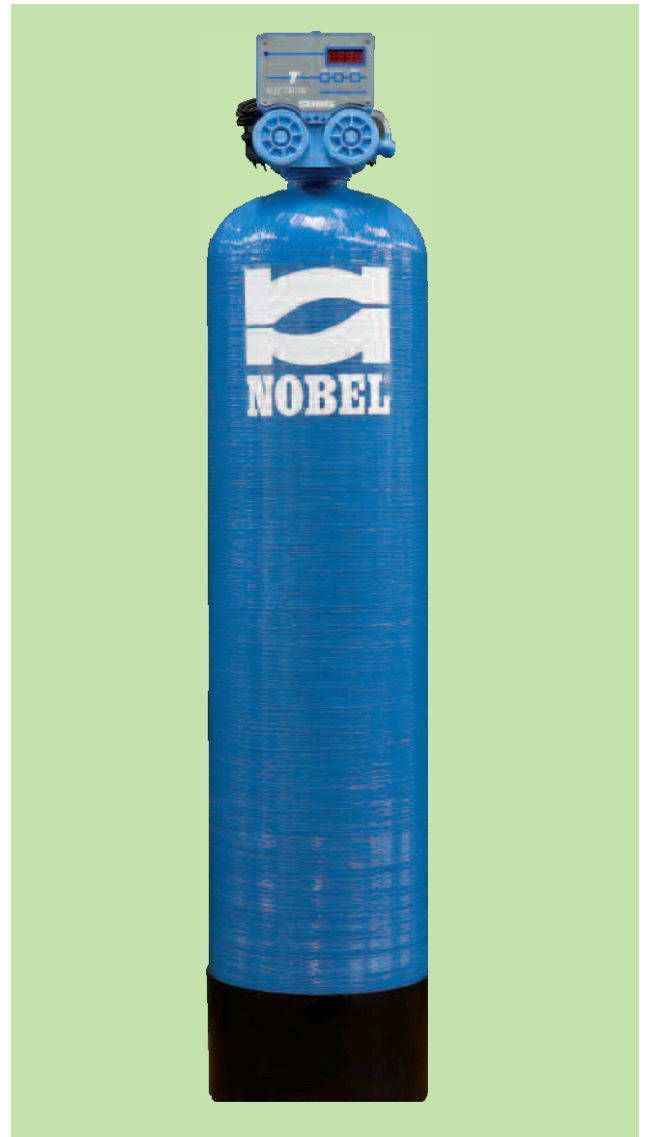


( )

	mm					
	mm		mm		mm	
	mm	mm	mm	mm	mm	mm
<b>FCV 01/T</b>	250	8	1400	55	1	75
<b>FCV 02/T</b>	55	10	1600	63	1	140
<b>FCV 03/T</b>	330	13	1600	63	1	210
<b>FCV 04/T</b>	355	14	1900	75	1	240
<b>FCV 05/T</b>	400	16	1900	75	1½	340
<b>FCV 07/T</b>	460	18	1900	75	1½	400
<b>FCV 11/T</b>	610	24	2300	91	2	660
<b>FCV 18/T</b>	760	30	2400	94	2	960

(\*)

- : 2.0 ÷ 6.0 bar (20\*0 ÷ 600 kPa)
- : 5 ÷ 40°C (41 ÷ 104°F)
- : 220 V 50 Hz 10 w
- : 12 V 50 Hz

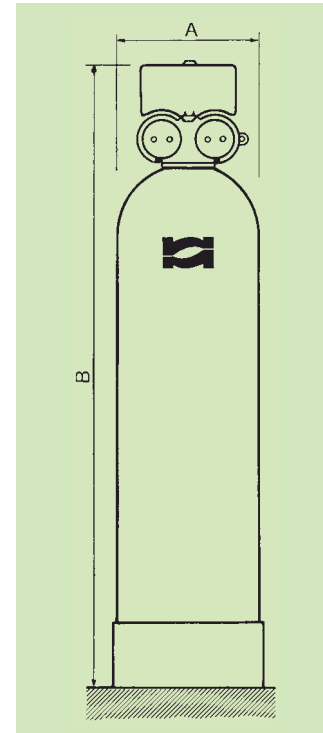

	m3/h	m3/h	m3/h	( )			( )
				( )			
				0.4÷0.7(*)	1÷2(*)	2÷ 3(*)	
<b>FCV 01/T</b>	0,7	1,5	1,1	20	6	5	6
<b>FCV 02/T</b>	1	2	1,5	40	12	10	10
<b>FCV 03/T</b>	1,7	3,4	2,5	60	20	15	18
<b>FCV 04/T</b>	2	4	3,5	70	20	15	20
<b>FCV 05/T</b>	2,5	5	3,6	75	50	25	35
<b>FCV 07/T</b>	3,2	6,4	4,8	100	50	25	35
<b>FCV 11/T</b>	5,6	11,2	8,4	175	75	50	52
<b>FCV 18/T</b>	9	18	13,5	250	125	75	66

\*

kPa

%

